


SmokeCloak EASY

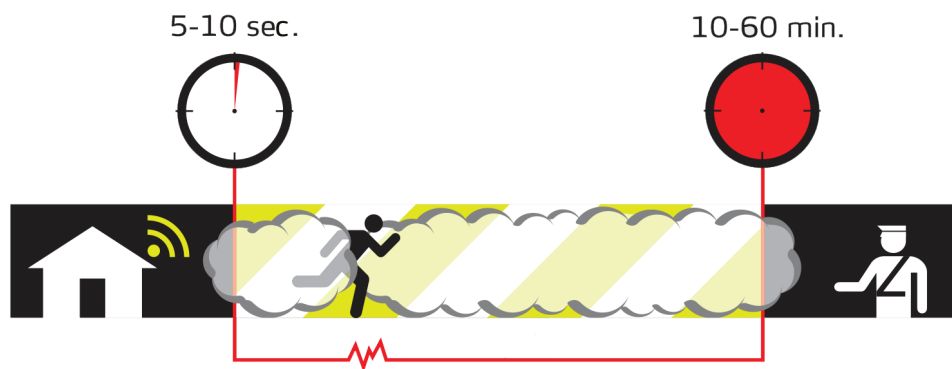

The **SmokeCloak EASY** range is the perfect choice for securing a wide variety of areas, for instance:

- Small rooms with PC-equipment, Server rooms, flat screens, optical equipment, valuable documents etc.
- Local security (point security) - securing a local area in a large room
- High value stores with safes, expensive goods such as narcotics & firearms, jewellery, tobacco etc.
- Larger open plan stores/offices
- Armed robbery protection in high security environments

Product features

- Very high output of dense white fog for maximum protection
- Harmless dry vapour with no negative side effects
- The fog hangs up to an hour
- Fluid refill system
- Danish design
- Battery back-up
- Heavy duty sabotage resistant case
- Internal system status LED indicators
- Built-in self diagnostics
- Electronic fluid measurement system
- Output signals for communication with existent alarm system
- Input signals for controlling the SmokeCloak from existing alarm systems



	EASY 600	EASY 1100	EASY 2200
Output	30 sec.: 14832 ft ³ (7416*) 60 sec.: 22248 ft ³ (11124*)	30 sec.: 28393 ft ³ (45344*) 60 sec.: 45344 ft ³ (22672*)	30 sec.: 53996 ft ³ (26980*) 60 sec.: 71018 ft ³ (35491*)
Tested and approved in accordance with EN 50131-8:	Yes	Yes	Yes
Number of output nozzles	1	2	2 (straight or 30 degree)
Heat up time (ready)	9 min.	9 min.	9 min.
Fluid	1,0 litre fluid refill system	1,0 litre fluid refill system	1,0 litre fluid refill system
Installation weight	23.4 lbs	29.5 lbs	42.2 lbs
Dimensions	9.9 inches W x 7.6 inches D x 16.5 inches H	12.9 inches W x 7.6 inches D x 16.5 inches H	15 inches W x 8.8 inches D x 18.5 inches H
Reaction time	0,1 seconds	0,1 seconds	0,1 seconds
Pulse Function	Programmable via Dip switch	Programmable via Dip switch	Programmable via PC tool
Electricity	200 - 250V & 110V	200 - 250 V	200 - 250V
Power consumption	1500 watt @ 230 Volt / 1050 watt @ 110 V	2100 watt @ 230 V	1900watt @ 230 Volt
Average power consumption	75W	140W	107W full temp / 72W power save
Colour	white RAL 9016	white RAL 9016	white RAL 9016

*ft³ according to current EU standard EN 50131-8